



— P56 SAND

A high quality / washed silica sand, but screened to a slightly coarser particle size distribution, than P93. Used extensively as a concrete aggregate, plaster aggregate, and used in grout related products. It is also ideal for texture coating applications.

Product is available in 20kg or metric tonne (1,000kg) bulk bags.

INDUSTRIAL SANDS LTD. - sieve analysis.


SAND P56

DATE : 7/10/2019

SAMPLE WEIGHT : 200

SIEVE	WGT RET.	% RET.	ACC. % RET.	% PASSING
2.360	0.00	0.00%	0.00%	100.00%
1.180	0.00	0.00%	0.00%	100.00%
0.600	0.37	0.19%	0.19%	99.82%
0.300	14.81	7.41%	7.59%	92.41%
0.150	169.37	84.69%	92.28%	7.73%
PAN	15.36	7.68%	99.96%	0.05%
TOTAL	199.91			

F.MOD: 1.00

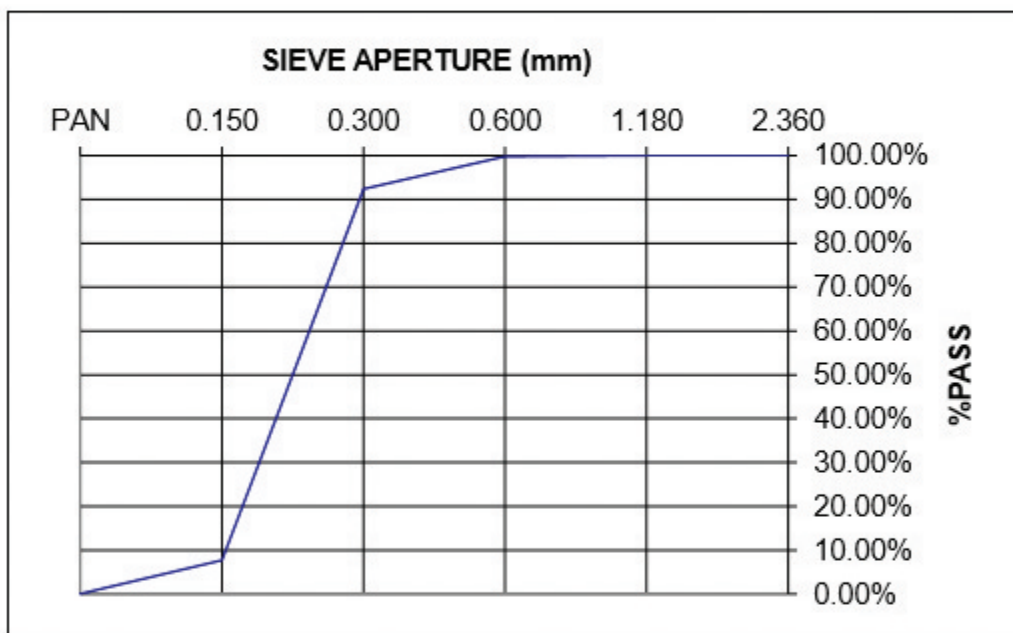

To request product information & for all general enquiries please contact us

+ 64 9 833 7576

www.industrialsands.co.nz